

[Home](#) ■ [Produkty](#) ■ [Separacja i obróbka piasku](#) ■ [Separatory płuczki piasku](#) ■ [Separator płuczka piasku HUBER RoSF G4E](#)

## Separator płuczka piasku HUBER RoSF G4E



### Grit separation, washing, dewatering in one system

- Reduced disposal costs
- Low investment costs
- Over 90% separation efficiency of grain size > 0.2 mm
- Reduction of organic content to < 5%
- Also suitable for classified grit trap material from biogas plants

The Grit Washer RoSF G4E combines continuous separation and washout of contaminated grit trap material in one plant.

#### **Grit classifying:**

Sediments from the grit trap are introduced in the upper part of the plant as a mixture of grit, organics and water. Due to the low surface overflow rate virtually all particles are separated and accumulate in the bottom part of the tank.

#### **Grit Washing:**

Due to the introduction of service water in combination with a slowly rotating circulation system the lighter organic particles can easily be separated from the dense mineral particles in the bottom part of the tank. After removal of the organic material the clean grit is automatically removed by a screw conveyor, at the same time statically dewatered, and discharged into a container.

The removed organics are continuously discharged with the introduced wash water.

## Korzyści

- Reduced disposal costs
- Reduced water consumption below 2 m<sup>3</sup>/h
- Surface overflow rate < 25 m/h
- 90% separation efficiency of grain size > 0.2 mm
- Reduction of organic content to ≤ 5 %
- Dry residue in washed grit > 90%
- Screened wastewater can be used as wash water
- Two plant sizes available (8 l/s and 16 l/s throughput)
- Optionally available as a classifier with wash function
- Also suitable for classified grit trap material from biogas plants


## Do pobrania

[Brochure: HUBER Grit Washer RoSF G4E](#) [pdf, 221 KB]

## Przykłady wdrożeń

- [Heavy-medium separation and washing system installed and commissioned at BEZ Hochfranken](#)

## Rysunek schematyczny

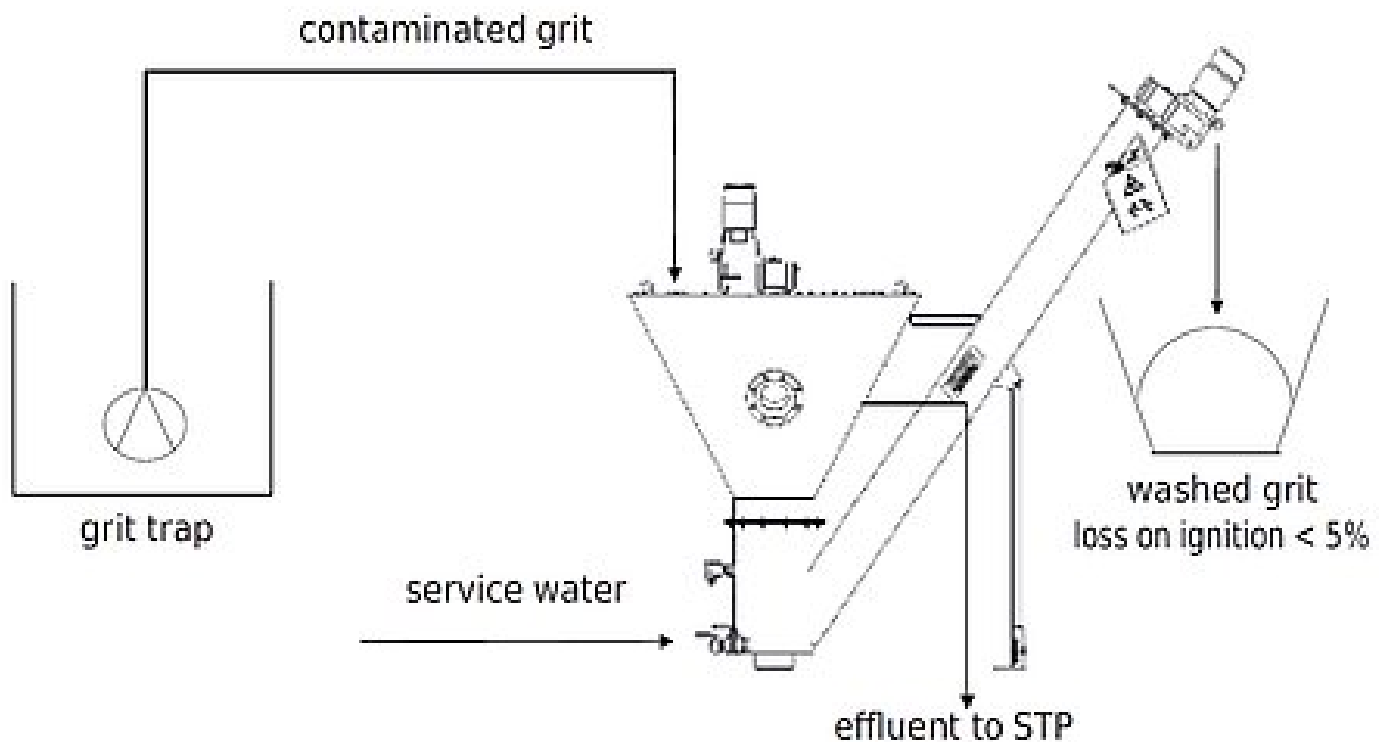

## Inne produkty z tej grupy Separatory płuczki piasku

- [HUBER Coanda Separator płuczka piasku RoSF4](#)
- [HUBER Separator płuczka piasku RoSF4 T](#)

---

Biuro Handlowe: ul. Ryżowa 51, 02-495 Warszawa, tel. + 48 22 572-28-60; fax + 48 22 572 28 68  
Serwis: ul. Ryżowa 51, 02-495 Warszawa, tel. + 48 22 572-28-60; fax + 48 22 572 28 98  
KRS: 0000132940 Organ rejestrowy: Sąd Rej. dla m.st. W-wy w Warszawie, XIII Wydział Gospod. KRS

NIP 521-009-28-15  
KRS 0000132940  
Kapitał zakładowy 500.000 zł

Member of the HUBER group:  
[www.huber.de](http://www.huber.de)

---