

[Home](#) ■ [Produkty](#) ■ [Separacja i obróbka piasku](#) ■ [Zblokowane urządzenia](#) ■
[HUBER Coanda Zblokowane urządzenie ROTAMAT® Ro5 C](#)

HUBER Coanda Zblokowane urządzenie ROTAMAT® Ro5 C



Complete mechanical wastewater treatment for small sewage treatment plants

- Wastewater fine screening
- Grit separation
- Grit classification

A container-mounted ROTAMAT® Micro Strainer removes solid material from the wastewater depending on its bar spacing (e.g. $e = 2$ mm). Screenings are removed and transported by a screw conveyor. Inside the closed rising pipe, screenings are dewatered and compacted by an integrated press. Subsequently, they are discharged into a container.

The cleaned wastewater flows by gravity into a COANDA circular grit trap. As the COANDA Tulip is fed through a vortex chamber, the wastewater flow gets tangential in addition to a radial flow direction. Air is sucked into the vortex and mixed with the wastewater flow.

The combination of three effects, namely the COANDA effect, the tea-cup effect and the air intake, guarantee that the organic components are kept on the surface and discharged over a weir while the grit settles in the lower trough area. The separated grit is removed through a classifying screw, statically dewatered and discharged into a container.

Korzyści


BENEFITS OF THE COANDA COMPLETE PLANT RO 5C

- Complete mechanical pre-treatment by the combination of fine screen, circular grit trap and grit classifier in one compact, encased unit
- Integrated dewatering and compaction of the screenings; option of screenings washing
- Max. throughput 40 l/s
- Fully automatic control
- Completely made of stainless steel, pickled in an acid bath
- Small space requirement
- Option of frost-proof design down to - 25° C

Do pobrania

 [Brochure: COANDA Complete Plant Ro 5C](#) [pdf, 265 KB]

Rysunek schematyczny

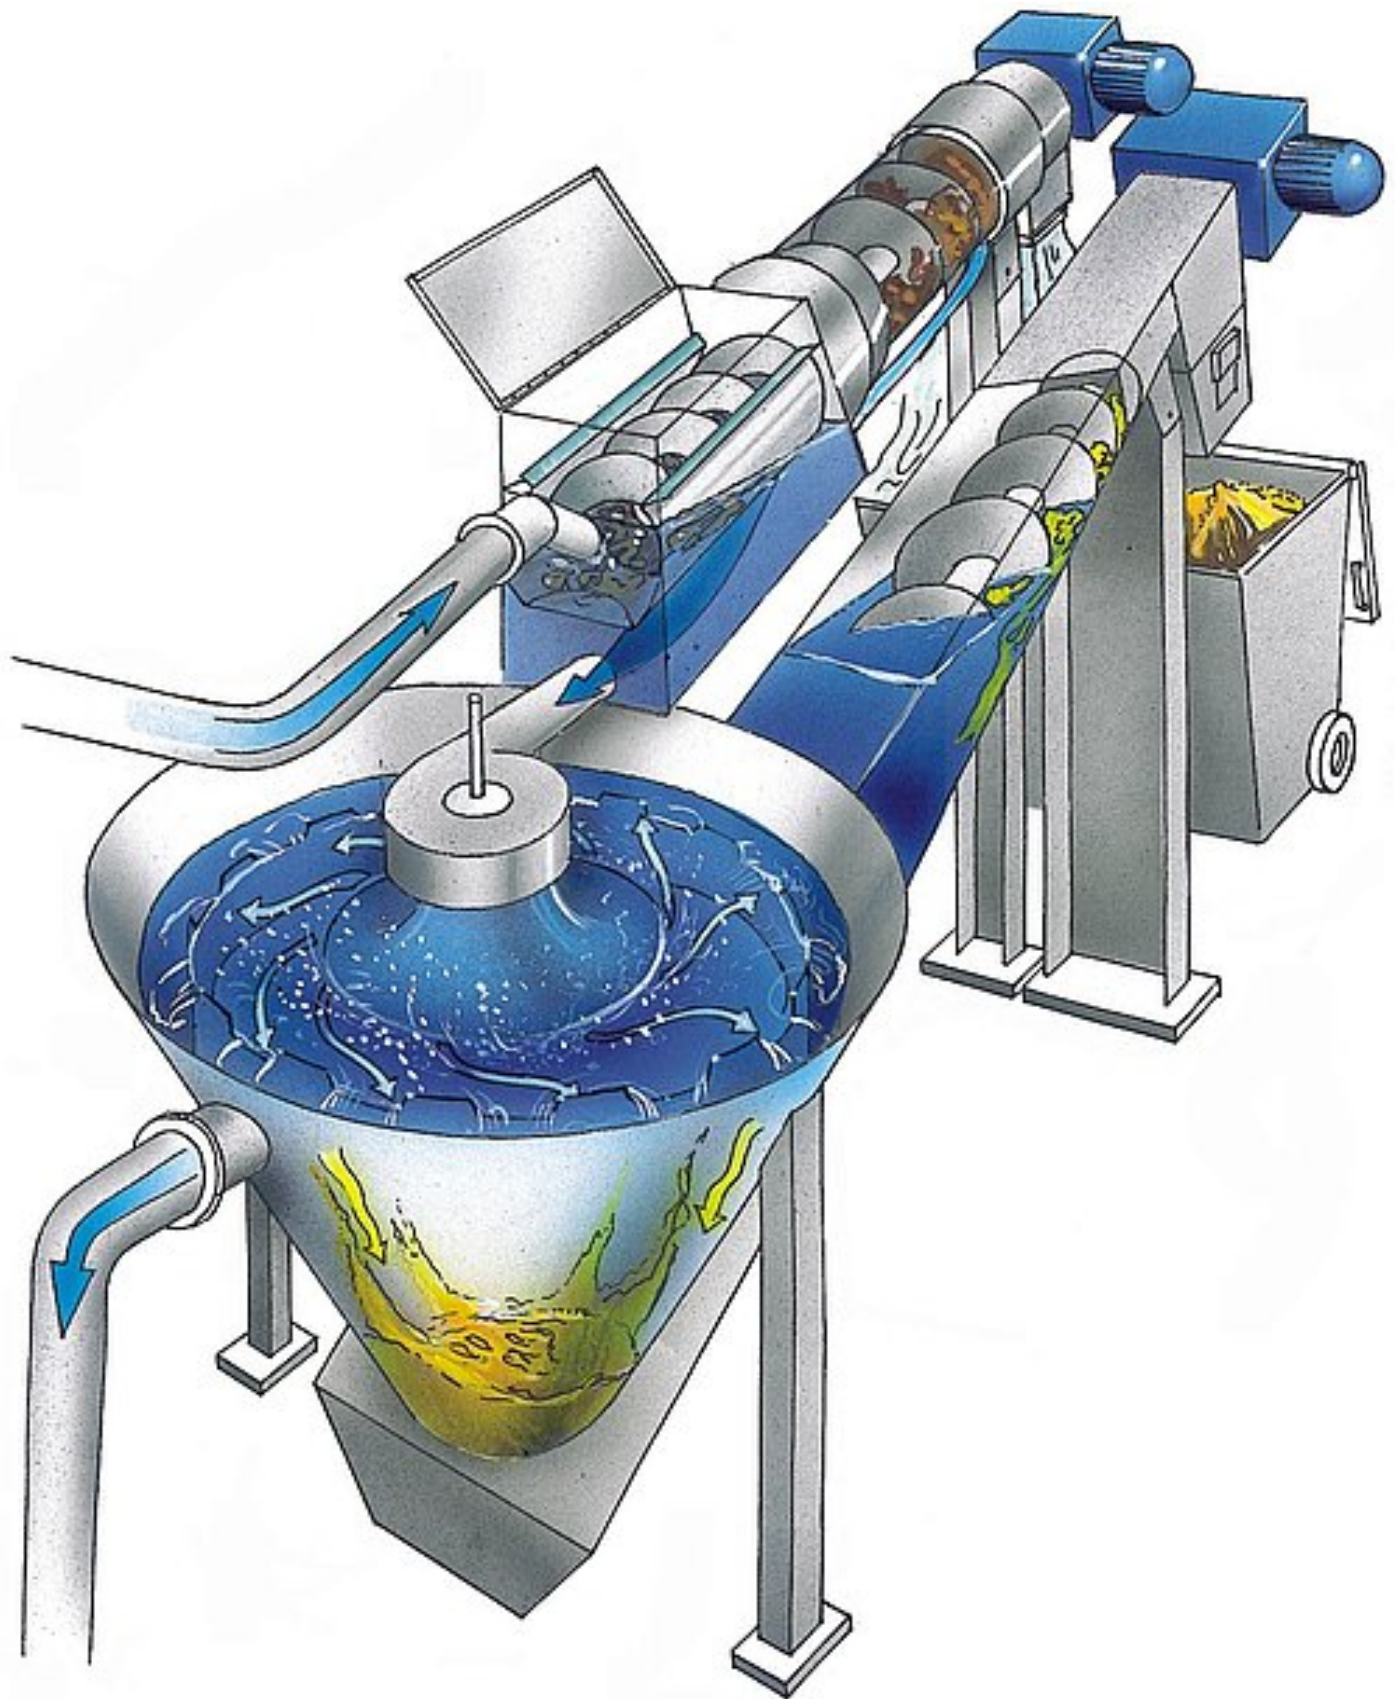

Zdjęcia



Inne produkty z tej grupy Zblokowane urządzenia

- [HUBER Zblokowane urządzenie ROTAMAT® Ro5](#)
- [HUBER Zblokowane urządzenie Hydro Duct ROTAMAT® Ro5 HD](#)

Biuro Handlowe: ul. Ryżowa 51, 02-495 Warszawa, tel. + 48 22 572-28-60; fax + 48 22 572 28 68
Serwis: ul. Ryżowa 51, 02-495 Warszawa, tel. + 48 22 572-28-60; fax + 48 22 572 28 98
KRS: 0000132940 Organ rejestrowy: Sąd Rej. dla m.st. W-wy w Warszawie, XIII Wydział Gospod. KRS

NIP 521-009-28-15
KRS 0000132940
Kapitał zakładowy 500.000 zł

Member of the HUBER group:
www.huber.de